
Metering CTs-Round Wire Type Encapsulated CTs-**ID 30mm**

POWERMAT provide a wide range of high accuracy Metering Current Transformers designed for precision and reliability. Our CTs come with a variety of window options to accommodate different cable and busbar sizes, ensuring seamless integration into diverse electrical systems. Built to meet international standards, our transformers offer superior insulation, minimal power loss, and long-lasting durability, making them ideal for commercial, industrial, and utility applications.

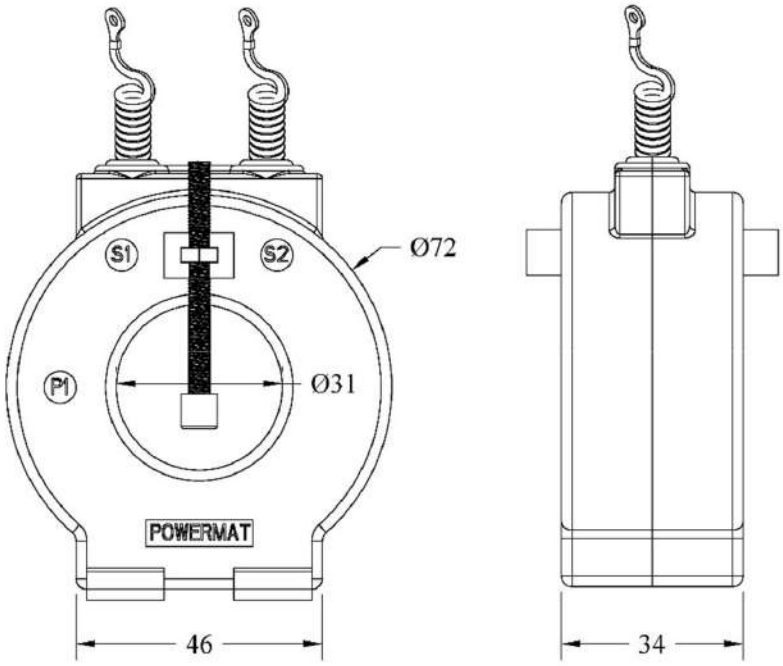

Series Name Nomenclature (MTW-XXXX - YYZ – 30)

Where XXXX refers to Primary Ampere to Secondary Ampere (e.g 200 A primary , 5 A secondary becomes 205 . 200 Ampere Primary , 1A Secondary become 201 and so on.
Where YY used to designates Burden (VA) as per Table.
Where Z used to Designates Accuracy Class as per Table.

POWERMAT MTW -30 SERIES		
PRIMARY CURRENT	ACCURACY	
	0.5	1.0
25/5 (4T)	2.5 VA	5 VA
30/5 (4T)	5 VA	5 VA
40/5 (2T)	2.5 VA	5 VA
50/5 (2T)	2.5 VA	5 VA
60/5 (2T)	5 VA	5 VA
80/5	2.5 VA	5 VA
100/5	2.5 VA	5 VA
125/5	5 VA	5 VA
150/5	5 VA	5 VA
200/ 5	5 VA	5 VA
250/5	5 VA	5 VA

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768